


ULTRA TITE

Superior Vinyl Replacement Series

PICTURE WINDOWS REPLACEMENT WINDOW



FEATURES & BENEFITS

- ▶ **Multi-chambered heavy-duty vinyl frame.** All corners are fused together at high temperatures for extraordinary strength and provide excellent insulation.
- ▶ **Sleek, low-profile frame** provides an expanded viewing area.
- ▶ **Flat 4-Side insert option available.**
- ▶ **Several combinations** available with other styles or combined together to create a special look.
- ▶ **LIMITED LIFETIME WARRANTY**

FEATURES & SPECIFICATIONS



FRAME


- Virgin vinyl frame and sashes are fusion welded to provide precise tolerances.
- 3 1/4" frame depth.
- Welded corners provide an additional air and water tight barrier for a home.

GLASS

- Energy efficient 7/8" insulated glass provides year round comfort.
- Several glass packages available.

POSSIBLE COMBINATIONS

Below are just a few examples of the several ways you can combine a picture window together or with another UltraTite style. An Ideal dealer can help you with the design possibilities.

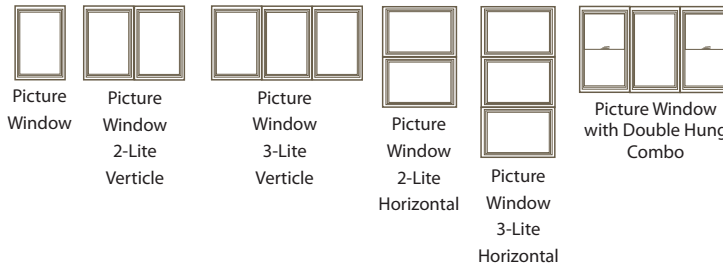

COLOR OPTIONS



Sahara Brown on the outside and Linen on the inside.

Oak on the inside and Linen on the outside

GLASS OPTIONS



OBSCURE GLASS




TILT ONLY PRIVACY BLINDS



ENERGY-SAVING PACKAGES

Ideal offers a range of energy-saving glass packages that meet or exceed the ENERGY STAR® requirements. Our R-5 window package qualifies for the U.S. Department of Energy's stringent Building Technologies Program for Highly Efficient R-5 Windows.

R-5	Energy Gold Plus	Energy Gold	Energy Smart
Triple pane Insulated Glass	Double Strength Dual pane Insulated Glass	Dual pane Insulated Glass	Dual pane Insulated Glass
Two surfaces of soft-coat LowE Glass. A blend of 45% Argon Gas and 45% Krypton Gas fills the sealed airspace. Frame and sash are foam filled. Warm Edge Intercept Spacer.	Two surfaces of soft-coat LowE Glass. Airspace filled with Argon Gas. Frame and sash are foam filled. DuraLite Spacer.	One surface of soft-coat LowE Glass. Airspace filled with Argon Gas. Frame and sash are foam filled. Warm Edge Intercept Spacer.	One surface of soft-coat LowE Glass. Airspace filled with Argon Gas. Ultra® Intercept Spacer.



GRIDS BETWEEN THE GLASS (GBG)



Enjoy the look of divided lites without the maintenance. Grids are placed between two panes of insulated glass, making cleaning a snap.

Select from a **contour** or **flat** grid


SIMULATED DIVIDED LITES (SDL)

Our SDL option includes contour grids mounted on the exterior of the glass with a high bond adhesive system. A shadow bar placed between the panes of insulated glass completes the look.



SDL
Simulated Divided Lites

Note:
SDLs not available on diamond grid pattern.



PENCIL GRIDS

Select from pewter or gold-tone.

THERMAL PERFORMANCE

NFRC's labels provide product-specific performance ratings for technical qualities such as U-Factor (the rate of heat loss from your home through the window during the winter), and Solar Heat Gain Coefficient (how much heat your house gains from the sun during the summer.) The NFRC label on a window gives consistent ratings that can help consumers determine both Winter and Summer performance characteristics. Look for low U-factor and SHGC numbers for highest efficiency performance.

Glass Package	U-Factor	SHGC	VT	CRF
Energy Smart	0.27	0.31	0.55	0.62
Energy Gold	0.28	0.31	0.56	0.59
Energy Gold Plus +	0.25	0.27	0.44	N/A
R5	0.18	0.26	0.41	0.69

STRUCTURAL PERFORMANCE

This window has been tested to the AAMA/WDMA/CSA 101/I.S 2/A440-05 standard for product performance. A higher DP rating indicates the product has passed higher performance requirements to the AAMA/WDMA/CSA 101/I.S 2/A440-05 testing standard.

Type	Size	Rating
Picture Window	48" x 48" (DSB)	DP 75

SIZE SPECIFICATIONS

Minimum Window Size		Maximum Window Size	
Width	14"	Width	75-1/2"
Height	14"	Height	75"

NOTES:

- Order by WIDTH x HEIGHT only.
- Width: 1/4", 1/2", 3/4", Full Inch
- Height: 1/4", 1/2", 3/4", Full Inch
- Maximum Size - 150-1/2 United Inches

Ideal Window Mfg.

100 West 7th Street • Bayonne, NJ 07002

Tel: 800-631-3400 • Fax: 800-758-7528

www.idealwindow.com



IDEAL WINDOW™
Our name says it all!